

5E

25 TO 30 WATT WIDE INPUT DC-DC CONVERTERS

Features:

- 30Watt Isolated Output
- 2:1 Input Range
- Six-Sided Shield
- Remote ON/OFF Control
- Efficiency to 84%
- 200KHz Switching Frequency

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF.	CASE
				NO LOAD	FULL LOAD		
5E01		5 VDC	5000 mA	30 mA	2700 mA	77	
5E02		12 VDC	2500 mA	30 mA	3150 mA	79	
5E03		15 VDC	2000 mA	30 mA	3150 mA	79	
5E04	9-18 VDC	±12 VDC	±1250 mA	35 mA	3100 mA	81	E
5E05		±15 VDC	±1000 mA	35 mA	3100 mA	81	
5E06		5/±12 VDC	3000/±625 mA	35 mA	3200 mA	78	
5E07		5/±15 VDC	3000/±500 mA	35 mA	3200 mA	78	
5E08		+5/+12/-5 VDC	3000/600/1000 mA	35 mA	2940 mA	77	
5E11		5 VDC	5000 mA	30 mA	1350 mA	77	
5E12		12 VDC	2500 mA	30 mA	1550 mA	81	
5E13		15 VDC	2000 mA	30 mA	1550 mA	81	
5E14	18-36 VDC	±12 VDC	±1250 mA	30 mA	1500 mA	84	E
5E15		±15 VDC	±1000 mA	30 mA	1500 mA	84	
5E16		5/±12 VDC	3000/±625 mA	30 mA	1580 mA	79	
5E17		5/±15 VDC	3000/±500 mA	30 mA	1560 mA	80	
5E18		+5/+12/-5 VDC	3000/600/1000 mA	30 mA	1450 mA	78	
5E21		5 VDC	5000 mA	15 mA	670 mA	78	
5E22		12 VDC	2500 mA	15 mA	770 mA	81	
5E23		15 VDC	2000 mA	15 mA	770 mA	81	
5E24	36-72 VDC	±12 VDC	±1250 mA	20 mA	750 mA	84	E
5E25		±15 VDC	±1000 mA	20 mA	750 mA	84	
5E26		5/±12 VDC	3000/±625 mA	20 mA	790 mA	79	
5E27		5/±15 VDC	3000/±500 mA	20 mA	780 mA	80	
5E28		+5/+12/-5 VDC	3000/600/1000 mA	20 mA	725 mA	78	

NOTE: 1. Nominal Input Voltage 12, 24 or 48 VDC



D1 International, Inc.

95 E. Main St. Huntington, NY 11743 USA • 631-673-6866 • Fax: 631-673-6893
www.d1international.com • e-mail: d1intl@aol.com



Specifications

5E SERIES

INPUT SPECIFICATIONS:

Input Voltage Range.....	12V.....	9-18V
	24V.....	18-36V
	48V.....	36-72V
Input Filter.....		Pi Type

OUTPUT SPECIFICATIONS:

Voltage Accuracy		
Single Output.....		±1.0% max.
Dual +Output.....		±1.0% max.
-Output.....		±3.0% max.
Triple, 5V.....		±1.0% max.
12V/15V.....		±5.0% max.
-5V.....		±2.0% max.
Voltage Balance (Dual).....		±1.0% max.
Transient Response:		
Single, 25% Step Load Change.....		<500µ s.
Dual, FL-1/2L±1% Error Band.....		<500µ s.
External Trim Adj. Range.....		±10%.
Ripple & Noise, 20MHz BW.....		10mV RMS, max. 75mV p-p max.
Temperature Coefficient.....		± 0.02%/°C
Short Circuit Protection.....		Continuous
Line Regulation ¹ , Single/Dual.....		±0.2% max.
Triple.....		±1.0% max.
Load Regulation ² , Single/Dual.....		±1.0% max.
Triple.....		±5.0% max.

GENERAL SPECIFICATIONS:

Efficiency.....	See Table
Isolation Voltage.....	500 VDC min
Isolation Resistance.....	10 ⁹ ohms
Switching Frequency.....	200kHz, min
Operating Temperature Range.....	-25°C to + 71°C
Case Temperature.....	100°C max.
Cooling.....	Free-Air Convection
Storage Temperature Range.....	-55°C to + 105°C
EMI/RFI.....	Six-Sided Continuous Shield
Dimensions.....	2.56 x 3.0 x 0.83 inches (65 x 76.2 x 21.1 mm)
Case Material.....	Black Coated Copper with Non-Conductive Base


1. Measured from high line to low line.
2. Measured from full load to 1/4 load.
3. Load regulation is for load change from 100% to 20% See graph of load regulation.

Output (Pin No.)	Voltage	Amperes	
		Min.(2)	Nom.
6	+5	0.5	3.0
3 & 5	+12 or -12	0.10	0.625
3 & 5	+15 or -15	0.10	0.500
3 & 5	+12 & -5	0.10/0.10	0.60/0.10

1. Maximum total power from all outputs is limited to 30 watts but no output should be allowed to exceed its maximum current.
2. Minimum current on each output is required to maintain specified regulation.

CASE E

All Dimensions In Inches(mm)

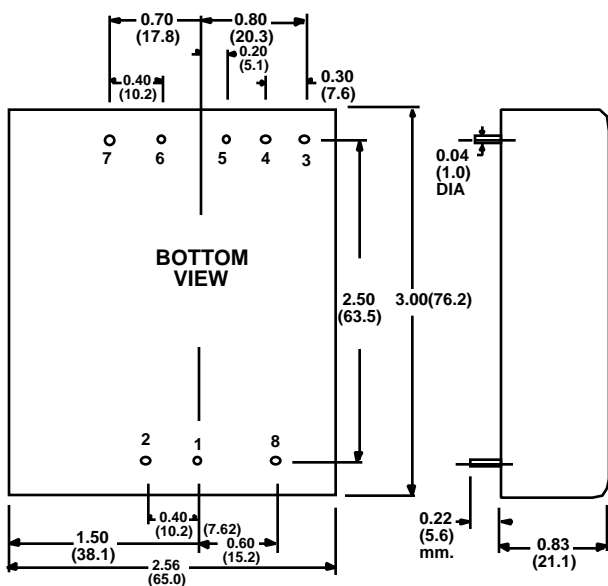

All Specifications Typical At Nominal Line, Full Load and 25°C Unless Otherwise Noted.

PIN CONNECTION

Pin	Single Output	Dual Output	Triple Output
1.	+Input	+Input	+Input
2.	-Input	-Input	-Input
3.	+Sense	+Output	+Output
4.	Output Trim	Common	Common
5.	-Sense	-Output	-Output
6.	+Output	No Pin	+5V Output
7.	-Output	No Pin	No Pin
8.	Remote On/Off Control		

Remote On/Off Control

Logic Compatibility	CMOS or Open Collector TTL
EC-On	>+5.5VDC or Open Circuit
EC-Off	<1.8 VDC
Shutdown Idle Current	10 mA
Input Resistance	100K ohms (Ein 0 VDC to 9 VDC)
Control Common	Referenced to Input Minus

External Output Trimming

Output may optionally be externally trimmed (±10%) with a fixed resistor or an external trimpot as shown.

